

Industrial Femtosecond Lasers

Maximum output of 120 W (IR)
or 50 W (UV)

NEW Single-shot – 10 MHz repetition rate

Pulse-on-demand and
BiBurst for pulse control


Automated harmonics up to the 5th
and wavelength-tunable extensions

Air-cooled or water-cooled models




CARBIDE-CB3


CARBIDE-CB3
Typical pulse duration

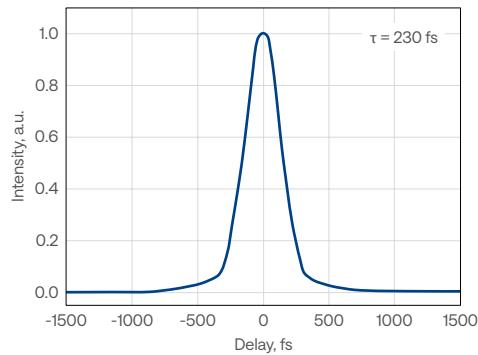


CARBIDE-CB3
Typical spectrum

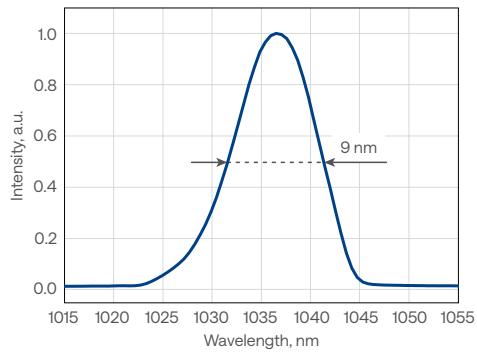

CARBIDE-CB3
Typical beam profile

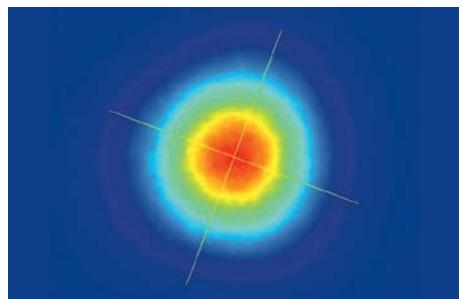

CARBIDE-CB3-120W
Long-term power stability

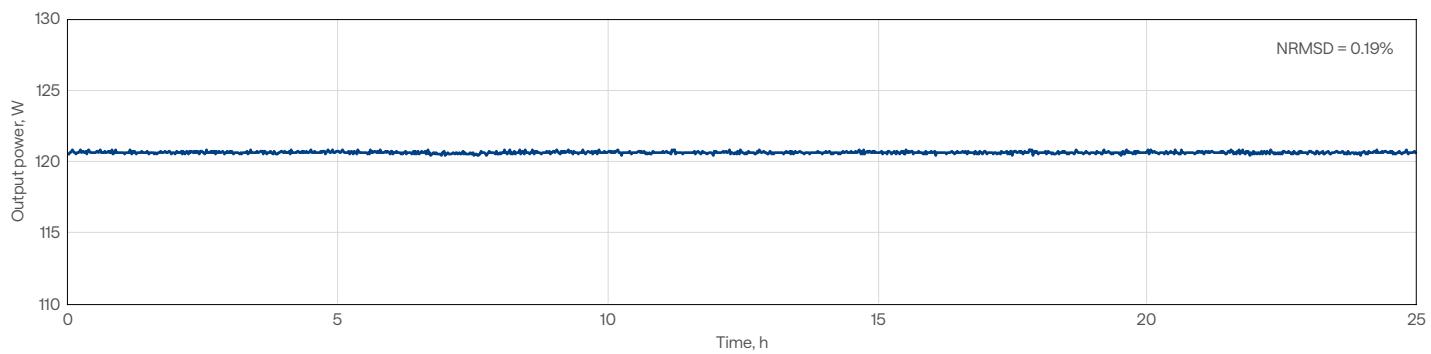

NEW

Model	CB3-20W	CB3-40W	CB3-40W-10MHz	CB3-80W	CB3-120W
-------	---------	---------	---------------	---------	----------

OUTPUT CHARACTERISTICS

Cooling method	Water-cooled							
Center wavelength	1030 ± 10 nm							
Maximum output power	20 W	40 W	80 W	120 W				
Pulse duration ¹⁾		< 250 fs	< 350 fs ²⁾	< 250 fs				
Pulse duration tuning range		250 fs – 10 ps	350 fs – 10 ps	250 fs – 10 ps				
Maximum pulse energy	0.4 mJ	0.2 mJ	0.8 mJ	2 mJ	1 mJ			
Repetition rate	Single-shot – 1 MHz (2 MHz on request)	Single-shot – 10 MHz	Single-shot – 10 MHz	Single-shot – 2 MHz				
Pulse selection	Single-shot, pulse-on-demand, any fundamental repetition rate division							
Polarization	Linear, vertical; 1:1000							
Beam quality, M ²	< 1.2							
Beam diameter ³⁾	3.9 ± 0.4 mm		4.2 ± 0.4 mm	5.1 ± 0.7 mm	5 ± 0.5 mm			
Beam pointing stability	< 20 µrad/°C							
Pulse energy control	FEC ⁴⁾	Attenuator ⁵⁾	FEC ⁴⁾					
Pulse picker leakage	< 0.25%	< 0.5%	< 0.25%					
Pulse-to-pulse energy stability, 12 h ⁶⁾	< 0.5%							
Long-term power stability, 100 h ⁶⁾	< 0.5%							

MAIN OPTIONS


Oscillator output ⁷⁾	< 0.5 W, 120 – 250 fs, 1030 ± 10 nm, ≈ 65 MHz		
Harmonic generator ⁸⁾	515 nm, 343 nm, 257 nm, or 206 nm; refer to CARBIDE HG		
Optical parametric amplifier ⁹⁾	UV – MIR; refer to I-OPA or ORPHEUS		
BiBurst option	Tunable GHz and MHz burst with burst-in-burst capability; refer to BiBurst		

PHYSICAL DIMENSIONS

Laser head (L × W × H)	633 × 350 × 174 mm		
Chiller (L × W × H)	585 × 484 × 221 mm	680 × 484 × 307 mm	
24 V DC power supply (L × W × H)	352 × 195 × 75 mm	376 × 449 × 88 mm	

ENVIRONMENTAL AND UTILITY REQUIREMENTS

Operating temperature	15 – 30 °C		
Relative humidity	< 80% (non-condensing)		
Electrical requirements	Laser	100 V AC, 7 A – 240 V AC, 3 A; 50 – 60 Hz	100 V AC, 12 A – 240 V AC, 5 A; 50 – 60 Hz
	Chiller	100 – 230 V AC; 50 – 60 Hz	200 – 230 V AC; 50 – 60 Hz
Rated power	Laser	1000 W	1000 W
	Chiller	1400 W	2000 W
Power consumption	Laser	500 W	900 W
	Chiller	1000 W	1300 W

¹⁾ Assuming a Gaussian pulse shape.²⁾ Pulse duration can be reduced to < 250 fs if a pulse peak intensity of > 50 GW/cm² is tolerated by the customer setup.³⁾ FWHM², using maximum pulse energy.⁴⁾ Fast energy control (FEC) provides fast, full-scale individual pulse energy control; an external analog control input is available.⁵⁾ Waveplate-based variable optical attenuator (VOA); an external analog control input is available. FEC is available for repetition rates up to 2 MHz.⁶⁾ Under stable environmental conditions. Expressed as normalized root mean squared deviation (NRMSD).⁷⁾ Available simultaneously, requires a scientific interface. Contact sales@lightcon.com for more details or customized solutions.⁸⁾ Integrated. For an external harmonic generator, refer to HIRO.⁹⁾ Integrated. For more details and stand-alone OPAs, refer to wavelength-tunable sources.

Model	CB5-6W	CB5-5W	CB5-SP
OUTPUT CHARACTERISTICS			
Cooling method		Air-cooled ¹⁾	
Center wavelength		1030 ± 10 nm	
Maximum output power	6 W		5 W
Pulse duration ²⁾		< 290 fs	< 190 fs
Pulse duration tuning range		290 fs – 20 ps	190 fs – 20 ps
Maximum pulse energy	100 µJ	83 µJ	100 µJ
Repetition rate		Single-shot – 1 MHz	
Pulse selection		Single-shot, pulse-on-demand, any fundamental repetition rate division	
Polarization		Linear, vertical; 1:1000	
Beam quality, M ²		< 1.2	
Beam diameter ³⁾		2.1 ± 0.4 mm	
Beam pointing stability		< 20 µrad/°C	
Pulse energy control	Attenuator ⁴⁾	AOM ⁵⁾	Attenuator ⁴⁾
Pulse picker leakage	< 2%	< 0.1%	< 2%
Pulse-to-pulse energy stability, 12 h ⁶⁾		< 0.5%	
Long-term power stability, 100 h ⁶⁾		< 0.5%	

MAIN OPTIONS





Oscillator output	n/a
Harmonic generator ⁷⁾	515 nm, 343 nm, 257 nm, or 206 nm; refer to CARBIDE HG
Optical parametric amplifier ⁸⁾	UV – MIR; refer to I-OPA or ORPHEUS
BiBurst option	n/a

PHYSICAL DIMENSIONS


Laser head (L × W × H)	633 × 324 × 162 mm
Chiller	Not required
24 V DC power supply (L × W × H)	220 × 95 × 46 mm

ENVIRONMENTAL AND UTILITY REQUIREMENTS


Operating temperature	17 – 27 °C
Relative humidity	< 80% (non-condensing)
Electrical requirements	100 V AC, 3 A – 240 V AC, 1.3 A; 50 – 60 Hz
Rated power	300 W
Power consumption	150 W

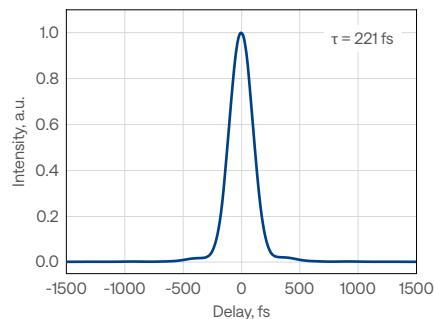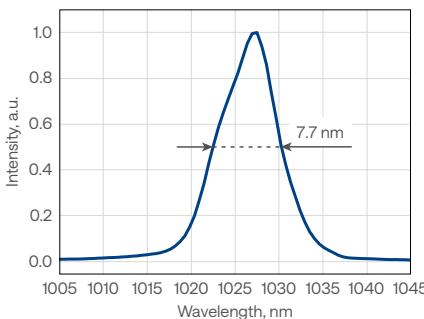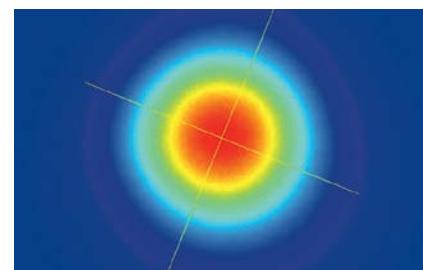¹⁾ Water-cooled version available on request.²⁾ Assuming a Gaussian pulse shape.³⁾ FWHM/e², using maximum pulse energy.⁴⁾ Waveplate-based variable optical attenuator (VOA); an external analog control input is available.⁵⁾ Enhanced contrast AOM. Provides fast, full-scale individual pulse energy control; an external analog control input is available.⁶⁾ Under stable environmental conditions. Expressed as normalized root mean squared deviation (NRMSD).⁷⁾ Integrated. For an external harmonic generator, refer to HIRO.⁸⁾ Integrated. For more details and stand-alone OPAs, refer to wavelength-tunable sources.**CARBIDE-CB5**
Typical pulse duration**CARBIDE-CB5**
Typical spectrum**CARBIDE-CB5**
Typical beam profile


CARBIDE-CB3 output power and beam direction stability with power lock enabled, across varying environmental conditions

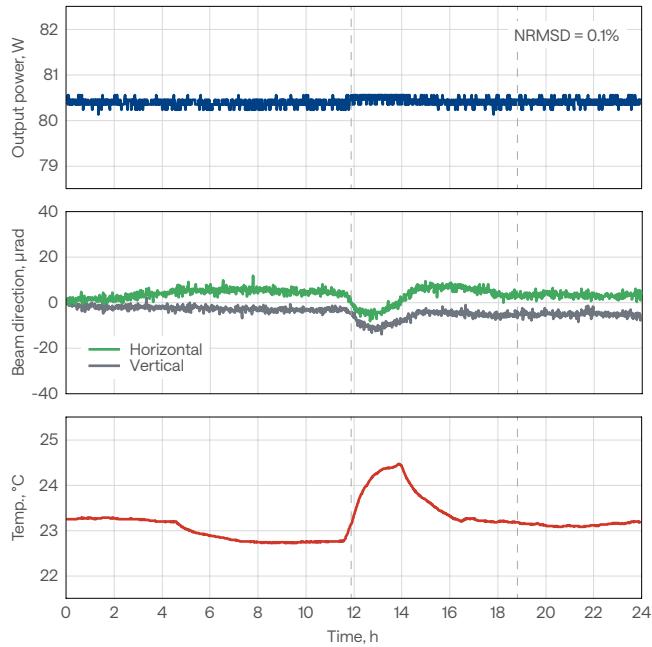

CARBIDE-CB3
Typical pulse-to-pulse energy stability

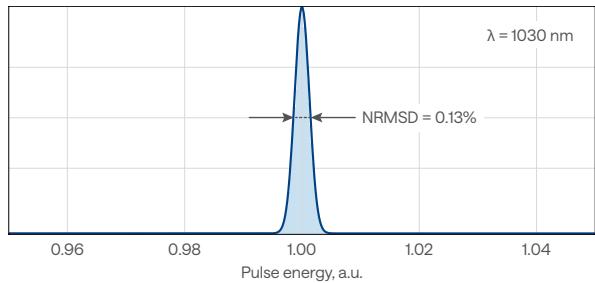


CARBIDE-CB5-6W
Long-term power stability

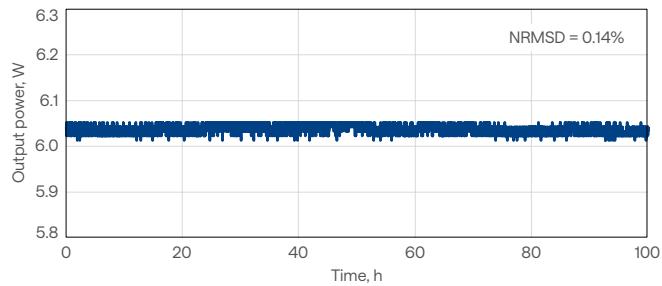


Drawings

CARBIDE-CB3

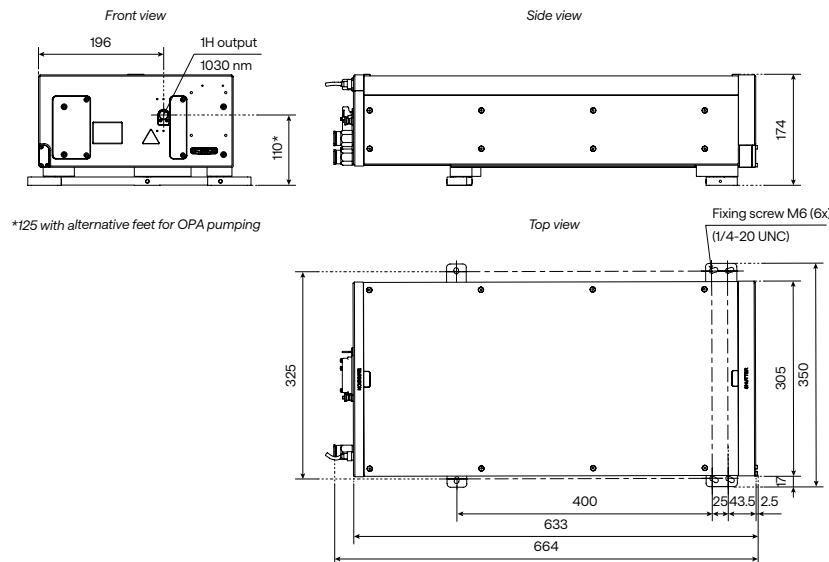

Air-cooled **CARBIDE-CB5** with an attenuator

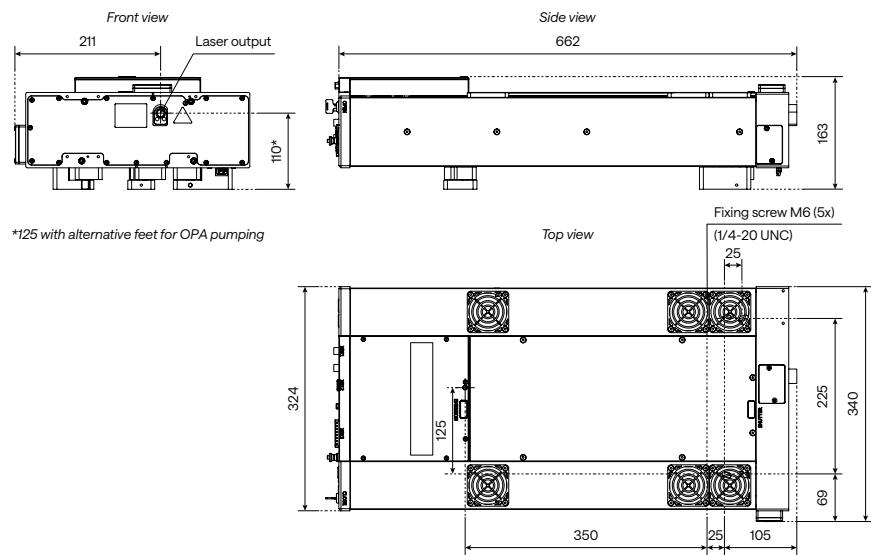

The drawings depend on the exact configuration. If crucial for integration, please contact sales@lightcon.com.

REV. 260101 | SALES@LIGHTCON.COM

